

51S,52S




玻璃保险丝管(慢断型)

GLASS TUBE FUSE (SLOW-BLOW)

51S/52S 平均 I-T 曲线图 (仅供参考)

51S/52S AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

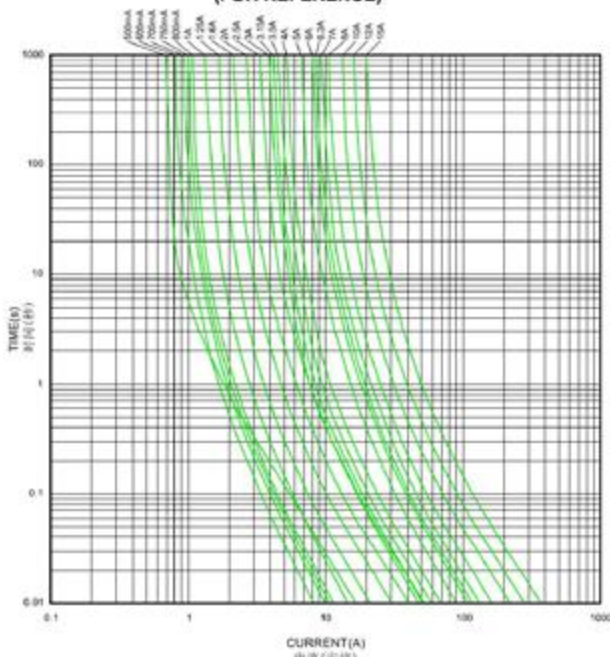


51S



52S

51S(P)



单位 Unit:mm



目录序号 CATALOG NO.	额定电流 CURRENT RATING	安全认证 SAFETY APPROVALS									PT 参考值 REFERENCE (A ² ·Sec) (RoHS)
		UL(CUL)		UR(CUR)		CSA		PSE		KTL	
		H	L	H	L	H	L	H	L	H	
51S,52S-0100H/L	100mA	●	●			●	●			●	0.058
51S,52S-0125H/L	125mA	●	●			●	●			●	0.112
51S,52S-0150H/L	150mA	●	●			●	●			●	0.172
51S,52S-0160H/L	160mA	●	●			●	●			●	0.200
51S,52S-0200H/L	200mA	●	●			●	●			●	0.347
51S,52S-0250H/L	250mA	●	●			●	●			●	0.560
51S,52S-0300H/L	300mA	●	●			●	●			●	0.735
51S,52S-0315H/L	315mA	●	●			●	●			●	0.815
51S,52S-0350H/L	350mA	●	●			●	●			●	0.995
51S,52S-0375H/L	375mA	●	●			●	●			●	1.166
51S,52S-0400H/L	400mA	●	●			●	●			●	1.507
51S,52S-0500H/L	500mA	●	●			●	●			●	2.831
51S,52S-0600H/L	600mA	●	●			●	●			●	0.504
51S,52S-0630H/L	630mA	●	●			●	●			●	0.566
51S,52S-0700H/L	700mA	●	●			●	●			●	0.675
51S,52S-0750H/L	750mA	●	●			●	●			●	0.833
51S,52S-0800H/L	800mA	●	●			●	●			●	1.03
51S,52S-010H/L	1A	●	●			●	●	●	●	●	2.14
51S,52S-012H/L	1.2A	●	●			●	●	●	●	●	3.96
51S,52S-013H/L	1.25A	●	●			●	●	●	●	●	5.30
51S,52S-015H/L	1.5A	●	●			●	●	●	●	●	8.44
51S,52S-016H/L	1.6A	●	●			●	●	●	●	●	9.80
51S,52S-020H/L	2A	●	●			●	●	●	●	●	14.58
51S,52S-025H/L	2.5A	●	●			●	●	●	●	●	25.99
51S,52S-030H/L	3A		●		●	●	●	●	●	●	14.36
51S,52S-032H/L	3.15A		●		●	●	●	●	●	●	15.85
51S,52S-035H/L	3.5A		●		●	●	●	●	●	●	20.14
51S,52S-040H/L	4A		●		●	●	●	●	●	●	30.80
51S,52S-050H/L	5A		●		●	●	●	●	●	●	52.42
51S,52S-060H/L	6A		●		●	●	●	●	●	●	86.95
51S,52S-063H/L	6.3A		●		●	●	●	●	●	●	96.53
51S,52S-070H/L	7A		●		●	●	●	●	●	●	128.1
51S,52S-080H/L	8A		●		●	●	●	●	●	●	188.8
51S,52S-090H/L	9A		●		●	●	●	●	●	●	247.6
51S,52S-100H/L	10A		●		●	●	●	●	●	●	314.8
51S,52S-120H/L	12A		●		●	●	●	●	●	●	506.3
51S,52S-150H/L	15A		●		●	●	●	●	●	●	819.4

H DENOTES FOR 250V (H表示 250V)

L DENOTES FOR 125V (L表示 125V)

● DENOTES FOR APPROVED (●表示已取得认证)

分断能力:

INTERRUPTING CAPACITY:

10,000 amperes at 125V AC (32mA-8A)

35 amperes at 250V AC (32mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-8A)

100 amperes at 125V AC (1A-15A) PSE (51S)

500 amperes at 125V AC (1A-15A) PSE (52S)

100 amperes at 250V AC (1A-15A) PSE (51S/52S)

100 amperes at 250V AC (100mA-10A) KTL

电气特性 ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME
100%	最快4小时 4 hours Min.
135%	最慢1小时 1 hour Max.
200%	最慢120秒 120 seconds Max.

智远 保险丝

Cheyen FUSE